

# ProxCARD® II Card

125 kHz Proximity

Durable, Value Priced Proximity Access Card • I326



**ACCESS** reliability.

## Application

The RF-programmable ProxCARD® II proximity access card is the industry choice for a cost-effective solution to proximity access control.

## Features

- ▶ Offers universal compatibility with all HID proximity readers.
- ▶ Provides durable packaging and consistent read range.
- ▶ Provides an external number for easy identification and control.
- ▶ Supports formats up to 85 bits, with over 137 billion codes.
- ▶ Custom pre-printed artwork available.
- ▶ A PVC overlay allows for on-site photo ID using most direct image printers.
- ▶ Using HID's ProxProgrammer®, card vendors can ship ProxCARD II proximity cards, custom programmed to their customers' requirements, from their own inventory. Enables smaller order quantities and overnight delivery. (Check with vendor for availability.)

## Features

## Specifications

### Proven, Reliable Technology

Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.

### Convenient To Use

Can fit into a wallet or purse. Use with a strap and clip as a photo ID badge.

### Cross-reference

A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.

### Security

Offers over 137 billion unique codes.

### Long Life

Passive, no-battery design allows for an infinite number of reads.

### Durability

Strong, flexible and resistant to cracking and breaking.

### Companion Products:

1321 Photo pouch overlay  
1324 PVC Direct print overlay

### Warranty

Lifetime warranty against defects in materials and workmanship (see complete sales policy for details).

### Typical Maximum\* Read Range

ProxPoint® Plus reader-up to 3" (7.5 cm)

MiniProx® reader-up to 5.5" (14 cm)

ThinLine® II reader-up to 5.5" (14 cm)

ProxPro® reader-up to 8" (20 cm)

ProxPro® II reader-up to 9" (22.9 cm)

Prox80™-up to 5.5" (14 cm)

MaxiProx® reader-up to 24" (60 cm)

\*Dependent on local installation conditions.

### Dimensions

2.135" x 3.385" x 0.075" MAX.

(5.4 x 8.6 x 0.19 cm)

### Operating Temperature

-50° to 160° F (-45° to 70° C)

### Weight

0.24 oz. (6.8 gm)

### Part Number

Base Part No.: 1326


### Description

RF-programmable, 125 kHz, HID artwork, customer-specified ID numbers, vertical slot punch.

### Options

- External card numbering (inkjet only; no laser engraving)
- Custom artwork (text or graphics)

(Please see "How to Order Guide" for a description of the options and associated part numbers.)

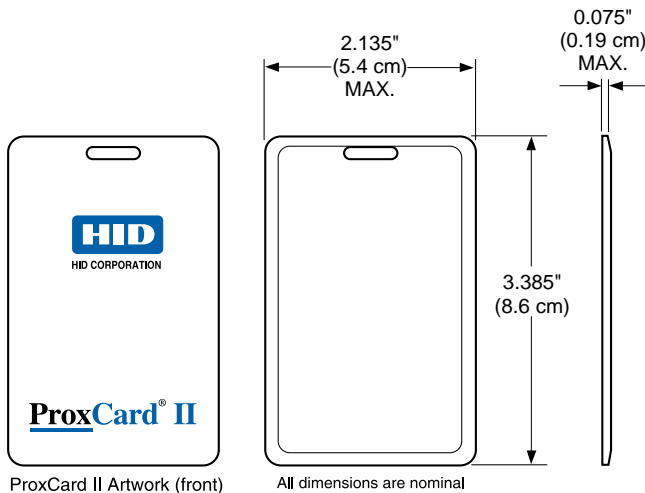

# IDWholesaler

photo identification **for less**

www.IDWholesaler.com

(800) 321-4405

**SHOP NOW** ▶



© 2007 HID Global. All rights reserved. HID, and the HID logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 4/2007

For best results, please print on recycled paper.

MKT-PROXCARDii\_DS\_EN



**ACCESS** experience.

hidcorp.com