


DuoProx® II Card

125 kHz Proximity

ISO-thin, imageable proximity access card with magnetic stripe • I336

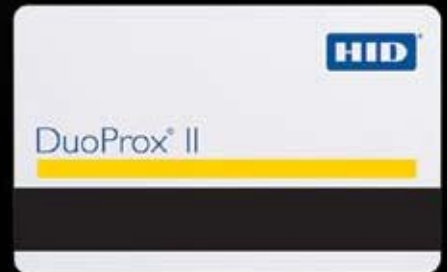

ACCESS reliability.


Application

The RF-programmable DuoProx® II multiple technology proximity card offers proximity, magnetic stripe and photo identification technologies on a single access control card.

Features

- ▶ Offers universal compatibility with all HID proximity readers.
- ▶ Provides an external number for easy identification and control.
- ▶ Supports formats up to 85 bits, with over 137 billion codes.
- ▶ Custom pre-printed artwork available.
- ▶ Meets ISO standards for thickness; use with all direct image or thermal transfer printers.
- ▶ Accepts either a horizontal or vertical slot punch.
- ▶ Using HID's ProxProgrammer™, card vendors can ship graphics-quality proximity cards, custom programmed to their customers' requirements, from their own inventory. Enables smaller order quantities and overnight delivery. (Check with vendor for availability.)

Proven, Reliable Technology	Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.
Thin	Can be carried with credit cards in a wallet or purse. Use with a strap and clip as a photo ID badge.
Photo ID Compatible	Print directly to the card with a direct image or thermal transfer printer. Slot punch vertically or horizontally for easy use.
Cross-reference	A cross-reference list correlating the external card number and the programmed ID number is provided for easy system administration.
Security	Offers over 137 billion unique codes.
Magnetic Stripe	Ready to be encoded by the customer. (See card construction.)
Long Life	Passive, no-battery design allows for an infinite number of reads.
Durability	Strong, flexible and resistant to cracking and breaking.
Custom Artwork	Custom multicolor graphics and text are available. Note: custom graphics may increase overall card thickness.
Warranty	Lifetime warranty against defects in materials and workmanship (see complete sales policy for details).

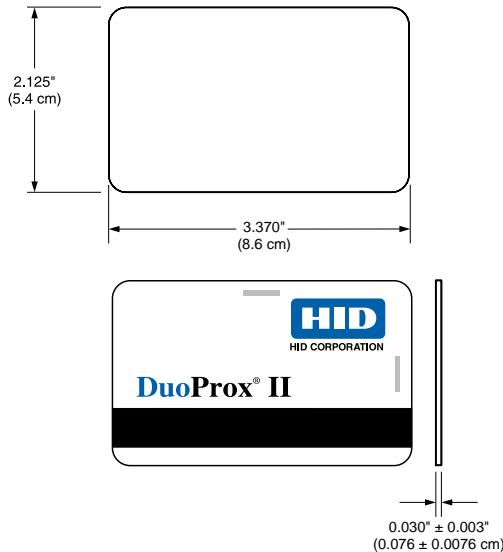

Typical Maximum* Read Range

ProxPoint® Plus reader-up to 2.5" (6.35 cm)
 MiniProx® reader-up to 5" (12.7 cm)
 ThinLine II® reader-up to 5" (12.7 cm)
 ProxPro® reader-up to 7" (17.8 cm)
 ProxPro® II reader-up to 8" (20 cm)
 Prox80™ Card reader-up to 5" (12.7 cm)
 MaxiProx® reader-up to 20" (50.8 cm)
 EntryProx™ reader-up to 2.5" (6.35 cm)
 pcProx™ Desktop reader-up to 2.5" (6.35 cm)

*Dependent on local installation conditions.

Dimensions

2.125" × 3.370" × 0.030" ± 0.003" nominal
 (5.4 × 8.6 × 0.076 ± 0.0076 cm)

Card Construction

Thin, flexible polyvinyl chloride (PVC) laminate with an ABA standard, high coercivity magnetic stripe rated 4000 Oersted.

Operating Temperature

-50° to 160° F (-45° to 70° C)

Weight

0.24 oz. (6.8 g)

Part Number

Base Part No.: 1336

Description

RF-programmable, 125 kHz, customer-specified ID numbers, locations marked for horizontal and vertical slot punch

Options

- External card numbering (inkjet or laser engraving)
- Slot punch (horizontal or vertical)
- Custom artwork (text or graphics)
- A variety of magnetic stripe types

(Please see "How to Order Guide" for a description of the options and associated part numbers.)

IDWholesaler
 photo identification **for less**
 www.IDWholesaler.com
 (800) 321-4405
[SHOP NOW ▶](#)

© 2007 HID Global. All rights reserved. HID, and the HID logo are trademarks or registered trademarks of HID Global in the U.S. and/or other countries. All other trademarks, service marks, and product or service names are trademarks or registered trademarks of their respective owners. Rev. 4/2007

For best results, please print on recycled paper.

MKT-DUOPROX_DS_EN



ACCESS experience.

hidcorp.com